

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US05/000907

International filing date: 13 January 2005 (13.01.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/557,206
Filing date: 29 March 2004 (29.03.2004)

Date of receipt at the International Bureau: 09 February 2005 (09.02.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

1278716

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

January 27, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/557,206

FILING DATE: *March 29, 2004*

RELATED PCT APPLICATION NUMBER: *PCT/US05/00907*



Certified by

Under Secretary of Commerce
for Intellectual Property
and Director of the United States
Patent and Trademark Office

Please type a plus sign (+) inside this box 

PTO/SB/16 (5-03)
Approved for use through 04/30/2003. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

INVENTOR(S)				
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)		
BYRON DUANE	EILENSTINE	MIDLAND, MICHIGAN 48640 USA		
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto				
TITLE OF THE INVENTION (280 characters max)				
METHOD OF MAKING EPOXYORGANOALKOXYSILANES				
Direct all correspondence to: CORRESPONDENCE ADDRESS				
<input checked="" type="checkbox"/> Customer Number		00137		Place Customer Number Bar Code Label here
OR		Type Customer Number here		
<input type="checkbox"/> Firm or Individual Name				
Address				
Address				
City		State		ZIP
Country		Telephone		Fax
ENCLOSED APPLICATION PARTS (check all that apply)				
<input checked="" type="checkbox"/> Specification	Number of Pages	6	<input type="checkbox"/> CD(s), Number	
<input type="checkbox"/> Drawing(s)	Number of Sheets		<input checked="" type="checkbox"/> Other (specify)	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76		CLAIMS: 1 PAGE ABSTRACT: 1 PAGE		
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)				
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees		FILING FEE AMOUNT (\$)		
<input checked="" type="checkbox"/> The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number		04-1520	\$160.00	
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.				
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.				
<input checked="" type="checkbox"/> No.				
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____				

Respectfully submitted,

SIGNATURE



TYPED or PRINTED NAME JIM L. DECESARE

TELEPHONE

(989) 496-4235

Date 3-27-04

REGISTRATION NO.

27,979

(if appropriate)

Docket Number:

DC10024PSP1

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Provisional Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)Applicant(s): **BYRON DUANE EILENSTINE**

Docket No.

DC10024PSP1

Serial No.

TO BE ASSIGNED

Filing Date

TO BE ASSIGNED

Examiner

TO BE ASSIGNED

Group Art Unit

TO BE ASSIGNEDInvention: **METHOD OF MAKING EPOXYORGANOALKOXYASILANES**I hereby certify that this **COVER SHEET; PROVISIONAL APPLICATION; POSTCARD***(Identify type of correspondence)*

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: Director of the United States Patent and Trademark Office, P.O. Box 1450, Alexandria, VA 22313-1450 on

March 29, 2004
(Date)

KELLY J. SMITH*(Typed or Printed Name of Person Mailing Correspondence)*

Kelly J. Smith
(Signature of Person Mailing Correspondence)

EV319569772US*("Express Mail" Mailing Label Number)***Note: Each paper must have its own certificate of mailing.**

UNITED STATES PATENT APPLICATION

TITLE

Method of Making Epoxyorganoalkoxysilanes

5

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] Not applicable.

FIELD OF THE INVENTION

10 [0002] This invention is related to the preparation of epoxyorganoalkoxysilanes by the hydrosilation reaction of an olefin epoxide and a hydridoalkoxysilane in the presence of a rhodium catalyst.

BACKGROUND OF THE INVENTION

15 [0003] Hydrosilation is a known reaction involving the addition of a silicon hydride to an unsaturated hydrocarbon to form a silicon-carbon bond. It has been described in a number of US Patents including US Patent 5,208,358 (May 4, 1993), US Patent 5,258,480 (November 2, 1993), and US Patent 6,365,696 (April 2, 2002), for example. The present invention is an improvement on hydrosilation reactions as described in these patents.

20 [0004] Thus, while the '358 patent shows the particular rhodium catalyst used herein, the catalyst is used to make silyl ketene acetals by hydrosilation rather than to make epoxyorganoalkoxysilanes. The process of the '480 patent, while it teaches reacting olefin epoxides and hydridoalkoxysilanes to make epoxyorganoalkoxysilanes, the '480 patent uses a different rhodium catalyst, and it requires the presence of a tertiary amine stabilizer such as
25 methyldicocoamine to prevent gellation caused by epoxide ring opening during the hydrosilation reaction. Similarly, the '696 patent, while it teaches reacting olefin epoxides with hydridoalkoxysilanes to make epoxyorganoalkoxysilanes, the '696 patent uses a different rhodium catalyst, and it requires the presence of a carboxylic acid salt such as ammonium acetate to eliminate epoxide ring opening polymerization.

30

SUMMARY OF THE INVENTION

[0005] The invention is directed to an improved method of making epoxyorganoalkoxysilanes by hydrosilation, in which an olefin epoxide is reacted with an hydridoalkoxysilane, in the presence of a rhodium catalyst. In particular, the rhodium catalyst is $\text{RhCl}(\text{di-tert-butylsulfide})_2$, i.e., $\text{RhCl}[(\text{CH}_3)_3\text{C})_2\text{S}]_2$. It has been unexpectedly discovered that this particular rhodium catalyst is capable of catalyzing such hydrosilation reactions without opening of the epoxy ring, and that it can be used to catalyze such reactions without the aid or addition of stabilizers such as tertiary amines and carboxylic acid salts.

[0006] More particularly, the invention is directed to a method of making epoxyorganoalkoxysilanes by reacting an olefin epoxide with an hydridoalkoxysilane in the presence of $\text{RhCl}(\text{di-tert-butylsulfide})_2$ catalyst, in which (i) the reaction is free of the presence of a stabilizing agent, (ii) the reaction is carried out at a temperature in the range of 65-95 °C, and (iii) the olefin epoxide is present in the reaction in a molar excess of 5-25 percent over the stoichiometric amount necessary to react with the hydridoalkoxysilane.

[0007] Preferably, the reaction temperature is in the range of 70-75 °C, and the olefin epoxide is present in the reaction in a molar excess of about 10 percent over the stoichiometric amount necessary to react with the hydridoalkoxysilane.

[0008] These and other features of the invention will become apparent from a consideration of the detailed description.

BRIEF DESCRIPTION OF THE DRAWING

[0009] Not applicable.

DETAILED DESCRIPTION OF THE INVENTION


[0010] Hydridoalkoxysilanes that can be used in the hydrosilation reaction method according to the invention include organosilicon compositions such as trimethoxysilane $\text{HSi}(\text{OCH}_3)_3$, triethoxysilane $\text{HSi}(\text{OC}_2\text{H}_5)_3$, tri-n-propoxysilane $\text{HSi}(\text{OC}_3\text{H}_7)_3$, tri-isopropoxysilane $\text{HSi}[(\text{OCH}(\text{CH}_3)_2)]_3$, methyldimethoxysilane $(\text{CH}_3)\text{HSi}(\text{OCH}_3)_2$, methyldiethoxysilane $(\text{CH}_3)\text{HSi}(\text{OC}_2\text{H}_5)_2$, dimethylmethoxysilane $(\text{CH}_3)_2\text{HSi}(\text{OCH}_3)$, dimethylethoxysilane $(\text{CH}_3)_2\text{HSi}(\text{OC}_2\text{H}_5)$, and phenyldiethoxysilane $(\text{C}_6\text{H}_5)\text{HSi}(\text{OC}_2\text{H}_5)_2$.

[0011] Olefin epoxides suitable for use in the hydrosilation reaction method according to the invention can be compositions such as described in the '480 patent, including limonene oxide, allyl glycidyl ether, glycidyl acrylate, 1,2-epoxy-5-hexene, 1,2-epoxy-7-octene, 1,2-epoxy-9-decene, vinyl norbornene monoxide, and dicyclopentadiene monoxide. Other olefin epoxides which can be used include those ethylenically unsaturated epoxides described in the '696 patent, such as butadiene monoxide (3,4-epoxy-1-butene), 4-vinylcyclohexene monoxide (VCMX), and 1-methyl-4-isopropenyl cyclohexene monoxide.

[0012] As noted above, the catalyst used in carrying out the hydrosilation reaction according to the invention is the rhodium catalyst $\text{RhCl}(\text{di-tert-butylsulfide})_2$, i.e.,

$\text{RhCl}[(\text{CH}_3)_3\text{C})_2\text{S}]_2$. It can be prepared by standard procedures used for reacting RhCl_3 and di-tert-butylsulfide.

[0013] In a most preferred embodiment of the present invention, the hydridoalkoxysilane used is trimethoxysilane, and it is reacted with an olefin oxide which is vinylcyclohexene monoxide, in the presence of rhodium catalyst $\text{RhCl}(\text{di-tert-butylsulfide})_2$, to produce the epoxyorganoalkoxysilane composition 2-(3,4-epoxycyclohexyl)ethyltrimethoxysilane. This reaction scenario is shown below:

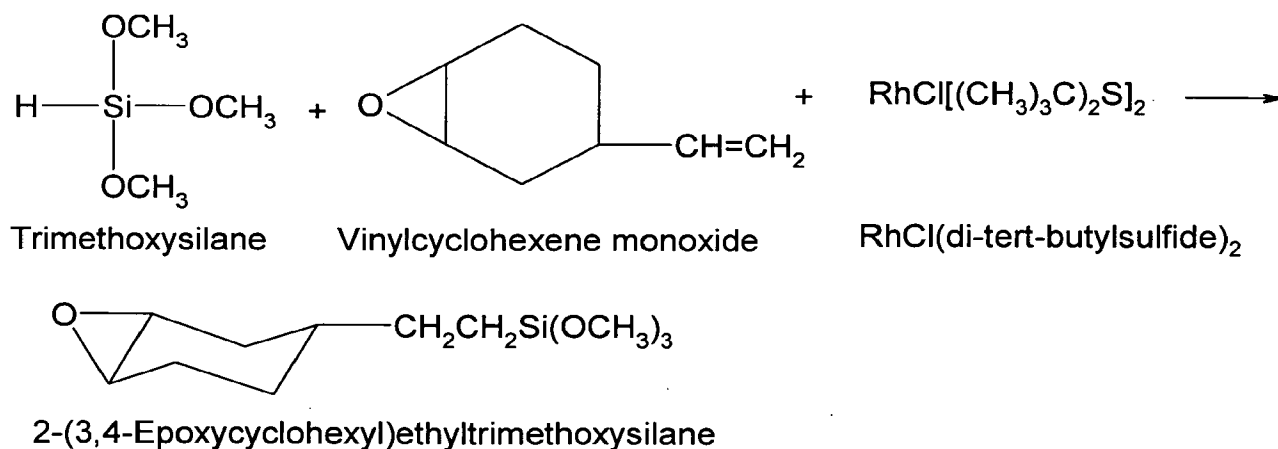

[0014] The method according to the invention is carried out using from 10-30 parts per million of the rhodium catalyst, based on the combined weight of all of the ingredients used in the reaction. The preferred amount of the catalyst is about 15 parts per million. The hydridoalkoxysilane and the olefin epoxide are used in amounts such as to provide a 5-25 percent molar excess of the olefin epoxide over the stoichiometric amount. The preferred amount of olefin epoxide is such as to provide about a 10 percent molar excess of olefin

epoxide. The reaction can be carried out at a temperature range of 65-95 °C, preferably at a range of 70-75 °C, and at atmospheric pressure. If desired, solvents may be used in the reaction such as hydrocarbon compositions, including toluene, octane and xylene for example. The reaction can be carried out batchwise, semi-batchwise or continuously.

- 5 Stripping and distillation procedures can be included as a step of the process in order to purify the product of the reaction.

EXAMPLES

- 10 [0015] The following examples are set forth in order to illustrate the invention in more detail.

Example 1

- [0016] This example shows the specificity of $\text{RhCl}(\text{di-tert-butylsulfide})_2$ to catalyze the reaction of trimethoxysilane and vinylcyclohexene monoxide (VCMX) to form the end product 2-(3,4-epoxycyclohexyl)ethyltrimethoxysilane (ECHETMS). The reactor used consisted of a 500 milliliter flask equipped with a water cooled condenser, a magnetic stirrer, and a thermometer. The reactor was charged with 55.53 gram of vinylcyclohexene monoxide, 0.38 gram of a toluene solution containing 0.0057gram of the $\text{RhCl}(\text{di-tert-butylsulfide})_2$ catalyst. The mixture was stirred and heated to 70 °C. After the mixture had reached 70 °C, heat was removed, and 50.00 gram of trimethoxysilane were added, so as to provide a 10 percent molar excess of VCMX over the stoichiometric amount. The trimethoxysilane feed rate was regulated to ensure the temperature within the reactor remained between 70-80 °C. After all of the trimethoxysilane had been added, the reactor temperature was maintained between 70-80 °C for 30 minutes. The reactor was then allowed to cool, and a sample was analyzed using gas chromatography. The analysis indicated a yield of 2-(3,4-epoxycyclohexyl)ethyltrimethoxysilane in terms of area percent of 84.07.

Example 2

- 30 [0017] The effect of the reactor temperature, as well as the concentration of the rhodium catalyst $\text{RhCl}(\text{di-tert-butylsulfide})_2$ and vinylcyclohexene monoxide, were evaluated in a series of eleven runs. All of the runs in the series were performed according to the following

general procedure. To the reactor described in Example 1, were added vinylcyclohexene monoxide and

RhCl(di-tert-butylsulfide)₂ in amounts such as to provide reactor concentrations as shown below in Table 1. The mixture was stirred and heated to temperature ranges of 70-75 °C, 80-85 °C, or 95-100 °C. After the mixture had reached the desired temperature, heat was removed, and 50.00 gram of trimethoxysilane was added, to provide the molar excess of VCMX as shown in Table 1. The trimethoxysilane feed rate was regulated to ensure that the temperature within the reactor remained in the given range. After all of the trimethoxysilane had been added, the reactor temperature shown in Table 1 was maintained for 30 minutes.

The reactor was then allowed to cool, and a sample was analyzed using gas chromatography.

Table 1 - Effect of Reactor Temperature and Concentrations of VCMX and RhCl(di-tert-butylsulfide)₂ on the Reaction of Trimethoxysilane with VCMX

Run No.	% Molar Excess of VCMX	ppm of Rh Catalyst	Reactor Temp °C	Area % of ECHETMS	% Trimethoxysilane Reacted
1	20.09	9.72	95-100	75.74	83.41
2	20.11	31.19	95-100	67.29	74.11
3	39.90	29.28	80-85	69.00	82.88
4	39.86	10.30	80-85	69.23	83.14
5	39.98	9.84	95-100	67.53	81.14
6	20.11	10.99	80-85	79.07	87.08
7	39.94	30.67	95-100	66.15	79.47
8	20.00	30.16	80-85	76.56	84.28
9	30.03	14.67	70-75	74.80	86.12
10	19.99	9.98	70-75	78.29	86.18
11	10.04	10.19	70-75	84.07	88.32

[0018] In Table 1, Runs 1-8 were design of experiment (DOE) runs, and Runs 9-11 were optimizing runs based on the results of DOE Runs 1-8. Example 2 and Table 1 indicate that the optimal formulation for this particular reaction includes the use of a 10 percent molar excess of VCMX, 10 ppm of the Rh catalyst, and that the reactor temperature should be maintained at between 70-75 °C. These conditions yielded the most product and provided the highest conversion of trimethoxysilane into the product, while minimizing byproducts. The effect of the temperature on the reaction was unexpected. For example, in DOE Runs 1-8, the

temperature was higher than the temperature in the optimizing Runs 9-11. The DOE Runs 108 indicated that higher temperatures statistically produced lower product yields.

[0019] In addition, Table 1 shows that the $\text{RhCl}(\text{di-tert-butylsulfide})_2$ rhodium catalyst is capable of catalyzing the hydrosilation reactions according to the invention, without opening
5 of the epoxy ring; and that it can be used to catalyze such reactions, without the aid or addition of stabilizers such as the tertiary amines and carboxylic acid salts required in accordance with the teaching of the prior art, in order to obtain significant yields of the desired epoxyorganoalkoxysilane product.

[0020] The epoxyorganoalkoxysilane compositions prepared herein are useful as adhesion
10 promoters for epoxy, urethane, and acrylic surfaces; as reinforcing materials for resins; in the surface pretreatment of fillers and reinforcing agents; and to enhance polyester tire cord adhesion.

[0021] Other variations may be made in compounds, compositions, and methods described herein without departing from the essential features of the invention. The embodiments of the
15 invention specifically illustrated herein are exemplary only and not intended as limitations on their scope except as defined in the appended claims.

CLAIM OR CLAIMS

1. A method of making epoxyorganoalkoxysilanes comprising reacting an olefin epoxide with an hydridoalkoxysilane in the presence of $\text{RhCl}(\text{di-tert-butylsulfide})_2$ catalyst, the
5 reaction being free of the presence of a stabilizing agent, the reaction being carried out at a temperature in the range of 65-95 °C, and the olefin epoxide being present in the reaction in a molar excess of 5-25 percent over the stoichiometric amount necessary to react with the hydridoalkoxysilane.
- 10 2. The method according to Claim 1 in which the reaction temperature is in the range of 70-75 °C, and the olefin epoxide is present in the reaction in a molar excess of about 10 percent over the stoichiometric amount necessary to react with the hydridoalkoxysilane.
- 15 3. The method according to Claim 1 in which the olefin epoxide is a composition selected from the group consisting of limonene oxide, 4-vinylcyclohexene monoxide, allyl glycidyl ether, glycidyl acrylate, 1,2-epoxy-5-hexene, 1,2-epoxy-7-octene, 1,2-epoxy-9-decene vinyl norbornene monoxide, dicyclopentadiene monoxide, 1-methyl-4-isopropenyl cyclohexene monoxide, and butadiene monoxide.
- 20 4. The method according to Claim 1 in which the hydridoalkoxysilane is a composition selected from the group consisting of trimethoxysilane $\text{HSi}(\text{OCH}_3)_3$, triethoxysilane $\text{HSi}(\text{OC}_2\text{H}_5)_3$, tri-n-propoxysilane $\text{HSi}(\text{OC}_3\text{H}_7)_3$, tri-isopropoxysilane $\text{HSi}[(\text{OCH}(\text{CH}_3)_2)_3]$, methyldimethoxysilane $(\text{CH}_3)\text{HSi}(\text{OCH}_3)_2$, methyldiethoxysilane $(\text{CH}_3)\text{HSi}(\text{OC}_2\text{H}_5)_2$, dimethylmethoxysilane $(\text{CH}_3)_2\text{HSi}(\text{OCH}_3)$, dimethylethoxysilane $(\text{CH}_3)_2\text{HSi}(\text{OC}_2\text{H}_5)$, and
25 phenyldiethoxysilane $(\text{C}_6\text{H}_5)\text{HSi}(\text{OC}_2\text{H}_5)_2$.
5. The method according to Claim 1 in which the olefin epoxide is 4-vinylcyclohexene monoxide and the hydridoalkoxysilane is trimethoxysilane $\text{HSi}(\text{OCH}_3)_3$.

ABSTRACT

Epoxyorganoalkoxysilanes are made by reacting an olefin epoxide with an hydridoalkoxysilane in the presence of $\text{RhCl}(\text{di-tert-butylsulfide})_2$ catalyst. The reaction is
5 free of the presence of a stabilizing agent, it is carried out at a temperature in the range of 65-95 °C, and the olefin epoxide is present in the reaction in a molar excess of 5-25 percent over the stoichiometric amount necessary to react with the hydridoalkoxysilane. Preferably, the reaction temperature is in the range of 70-75 °C, and the olefin epoxide is present in the
10 reaction in a molar excess of about 10 percent over the stoichiometric amount necessary to react with the hydridoalkoxysilane.